

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 December 2000 (21.12.2000)

PCT

(10) International Publication Number
WO 00/76821 A1

(51) International Patent Classification⁷: **B61D 17/04**

(21) International Application Number: **PCT/SE00/01167**

(22) International Filing Date: **6 June 2000 (06.06.2000)**

(25) Filing Language: **Swedish**

(26) Publication Language: **English**

(30) Priority Data:
9902172-7 **10 June 1999 (10.06.1999) SE**

(71) Applicant (for all designated States except US): **DAIM-
LER CHRYSLER AG [DE/DE]; Epplerstrasse 225,
D-70567 Stuttgart (DE).**

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SJÖBÄCK, Conny
[SE/SE]; Skeppsgossevägen 9, S-393 59 Kalmar (SE).**


(74) Agents: **BERGLUND, Stefan et al.; Bjerkéns Patentbyrå
KB, Östermalmsgatan 58, S-114 50 Stockholm (SE).**

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **A CAR BODY AND A METHOD FOR PRODUCING A BEAM**

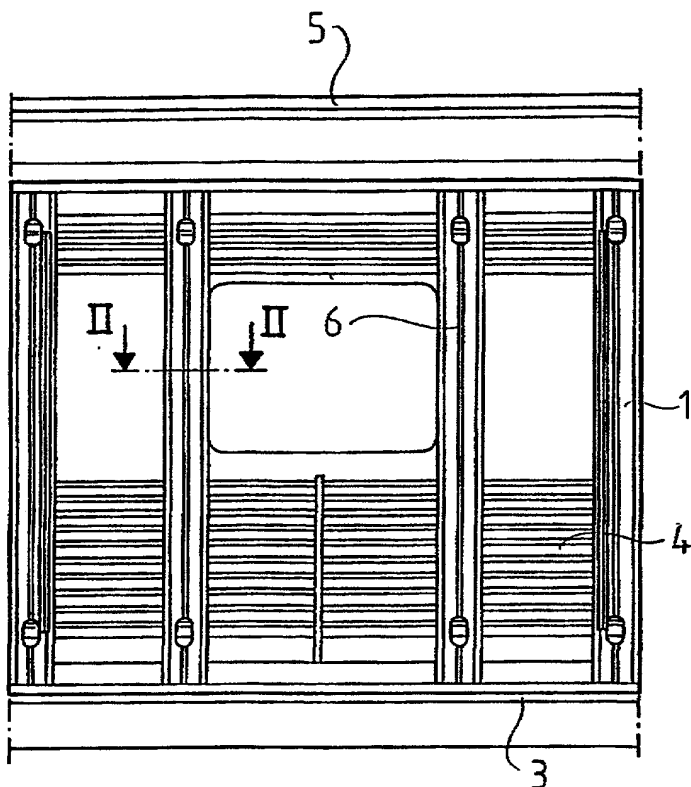

(57) Abstract: A car body for a rail vehicle including a plurality of beams (1) arranged to carry one or more wall elements (3-5). At least one of said beams (1) includes an attaching member (6), extending substantially in the longitudinal direction of the beam, for engagement with at least a part of one or more components intended to be supported by the beam (1).

WO 00/76821 A1